NOVARIX
LIGHTING

NRX-W238*

WALL MOUNTED UP/DOWN LIGHT

ITEM: NRX-238 * SERIES	INPUT VOLTAGE(V) **120 240**	REFLECTOR **R7**	LENS DEGREE(°)θ1/2 **24°**	CCT **3000K**



2383





2384

LIGHT SOURCE	**2×7W**
CONSUMPTION(W)	**15**
OPERATING CURRENT(MA)	**68**
POWER FACTOR(PF)	**0.931**
LUMINANCE(LM)	**480×2**
COLOR RENDERING INDEX	**RA: 80**
IK RATING	**04**
IP RATING	**65**

PRODUCT SPECIFICATIONS	
HOUSING	**12# Die-casting aluminum finishing or powder painting T=60-80μm. Adhesion of ISO class 1/ASTM class 4B**
LIGHT WINDOW	**PC**
GASKET	**Tooling shaped seal**
LED DRIVER	**Constant voltage input, constant current output**
LED TYPE	**COB**
OPERATING TEMPERATURE	**-20˚ C-40˚ C**
POWER CABLE	**Outside of luminaire 120V/240V: H05RN-F 3×1.0mm², L=0.3m**

DIAGRAM OF DIMENSION







PAINTING COLOR

Regular

KAP7037
Sanded Dark Grey


Secondary


RAL9005
Sanded BLack


KAP7008
Sanded Bronze

RAL9003
Sanded White

PHOTOMETRIC

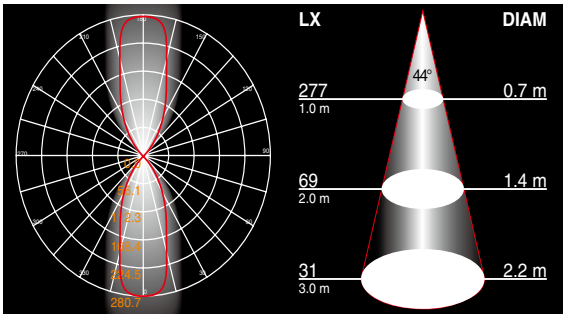

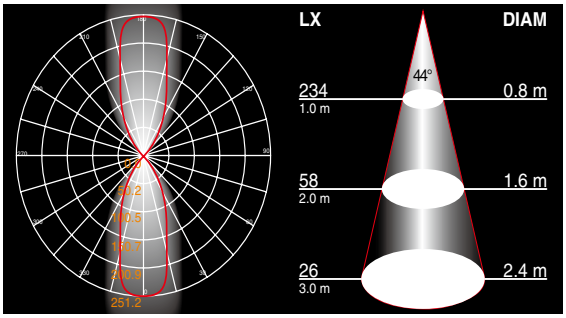

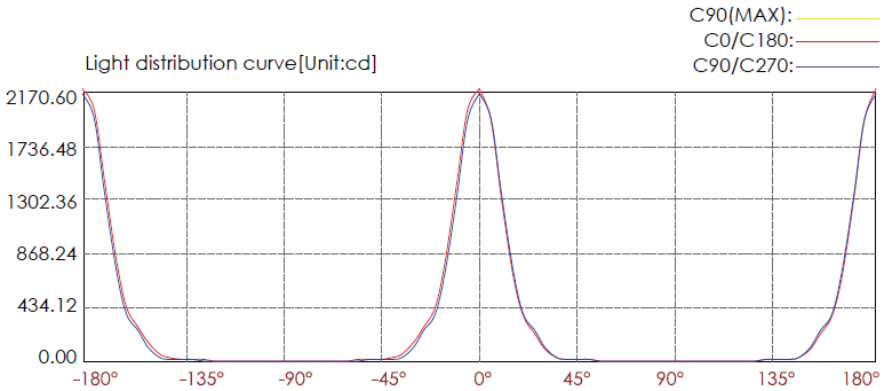

Lux distance curve

Illuminance at a distance

Center beam LUX		Beam width V	Beam width H
2m	542.65 LUX	0.9m	0.9m
4m	135.66 LUX	1.8m	1.7m
6m	60.29 LUX	2.6m	2.6m
8m	33.92 LUX	3.5m	3.5m
10m	21.71 LUX	4.4m	4.3m
12m	15.07 LUX	5.3m	5.2m

Ver.Spread:24.9 Horiz.Spread:24.4

CERTIFICATES

IP65 OUTDOOR RATED · RoHS COMPLIANT · CE · ETL LISTED US Intertek 3190551

* Specification subject to change without prior notice. Contact info@novarixlighting.com for more technical information.